



BIS PIPE FITTING





CERTIFICATE

The TÜV CERT Certification Body
of TÜV Anlagentechnik GmbH

TÜV Rheinland Group

certifies in accordance with
TÜV CERT procedures that



BIS PIPE FITTING INDUSTRY CO., LTD.

107 Moo 4, Petchkasem Road, Omnoi,
Kratumban, Samutsakorn 74130, Thailand

has established and applies a quality management system for

Manufacturing and Sales of Pipe Fittings

An audit was performed, Report No. 006508

Proof has been furnished that the requirements according to

DIN EN ISO 9001:2000

are fulfilled.

The certificate is valid until **2006 - 12 - 31.**

Certificate Registration No. **01 100 006508**



Bangkok, 2004-03-16
First certification 2000

TÜV Rheinland
Berlin Brandenburg

TÜV CERT Certification Body of
TÜV Anlagentechnik GmbH

COMPANY PROFILE



BIS is one of the leading manufacturer and exporter of the High Grade Malleable Iron Pipe Fittings for use in Water, Gas, Oil and Air services. **BIS** fittings are manufactured according to the International standards, namely, the **American standard [ANSI/ASTM]**, the **British standard [BS EN]**, and the **DIN/European standard [EN]**

Our production starts with careful sourcing of raw materials and supplies. State of the Art technologies and machines are introduced into the production process. Highly strict quality controls are implemented on every step of production to ensure the product quality delivering to the market. Through years of hard work and continuing improvement of quality, we are certified and accredited with the **DIN EN ISO 9001:2008** by BUREAU VERITAS for our entire quality system.






Over the years, use of **BIS** fittings proves to be the most effective and efficient, long lasting and durable, trustworthy yet economical for installation of pipelines whereas the **BIS** fittings have been widely supplied to more than 40 countries around the globe. Close and sincere cooperation with our suppliers and customers has put us on the leading edge.

The quality improvement on products and services is never ending at **BIS**. We are continuing to improve our quality fittings that value to save every single drop of water and save our earth.


Galvanized/Black Malleable Iron Pipe Fittings (Class 150) Standard specification :

Standard	AMERICAN	BRITISH	DIN
Design	ANSI/ASME B-16.3 ANSI/ASME B-16.14 ANSI/ASME B-16.39	BS EN 10242	EN 10242
Threads	ANSI/ASME B-1.20.1	BS 21	ISO7-1, ISO228-1
Material	ASTM A-197	BS 6681	EN 1562 (EN-GJMB-300-6)
Galvanizing	ASTM A-153	BS 729	DIN 2950
Type	BANDED	BANDED	BEADED




FIG. 1 BENDS M&F 90° (BMF 90)		SIZE (INCH)	a	b (mm.)	c	PCS/ INNER	QTY OF INNER	PCS/ MASTER	WT/ MASTER KGS.
 		1/8	32.0			50	12	600	
		1/4	38.0			80	6	480	27
		3/8	44.0			60	12	720	60
		1/2	52.0			40	8	320	43
		3/4	65.0			25	6	150	33
		1	82.0			20	4	80	30
		1-1/4	100.0			12	3	36	23
		1-1/2	115.0			10	3	30	26
		2	140.0			10	2	20	30
		2-1/2	175.0					10	26
		3	205.0					6	31
		4	260.0					4	35
		5	318.0					2	29
		6	375.0					1	24
FIG. 2 BENDS F 90° (BF 90)		SIZE (INCH)	a	b (mm.)	c	PCS/ INNER	QTY OF INNER	PCS/ MASTER	WT/ MASTER KGS.
 		1/2	52.0			35	8	280	43
		3/4	65.0			25	6	150	39
		1	82.0			20	4	80	33
		1-1/4	100.0			12	3	36	23
		1-1/2	115.0			12	2	24	22
		2	140.0			12	2	24	37
		2-1/2	175.0					10	29
		3	205.0					6	27
		4	260.0					2	19
		6	375.0						
FIG. 3 BENDS M&M 90° (BM 90)		SIZE (INCH)	a	b (mm.)	c	PCS/ INNER	QTY OF INNER	PCS/ MASTER	WT/ MASTER KGS.
 		1			63.0	20	4	80	30
		1-1/4			76.0	12	3	36	23
		1-1/2			85.0	10	3	30	26
		2			102.0	10	2	20	31
FIG. 40 BENDS M&F 45° (BMF 45)		SIZE (INCH)	a	b (mm.)	c	PCS/ INNER	QTY OF INNER	PCS/ MASTER	WT/ MASTER KGS.
 		3/8	35.0						
		1/2	38.0			50	8	400	43
		3/4	45.0			30	6	180	33
		1	55.0			25	4	100	31
		1-1/4	63.0			20	3	60	30
		1-1/2	70.0			15	3	45	27
		2	85.0			15	2	30	31
		2-1/2	100.0			8	2	16	27
		3	115.0					12	31
		4	145.0					5	25
		5	170.0					2	18
		6	195.0					1	15
FIG. 41 BENDS F 45° (BF 45)		SIZE (INCH)	a	b (mm.)	c	PCS/ INNER	QTY OF INNER	PCS/ MASTER	WT/ MASTER KGS.
 		1/2	38.0			40	8	320	45
		3/4	45.0			25	6	150	34
		1	55.0			25	4	100	35
		1-1/4	63.0			15	4	60	34
		1-1/2	70.0			15	3	45	32
		2	85.0			10	2	20	25
		2-1/2	100.0			6	2	12	25
		3	115.0					12	35
		4	145.0					5	26

**FIG. 90
ELBOWS 90° (L 90)**




SIZE (INCH)	a	b (mm.)	c	PCS/ INNER	QTY OF INNER	PCS/ MASTER	WT/ MASTER KGS.
1/8	17.5			50	B12	600	19
1/4	20.6			35	B12	420	20
3/8	24.1			45	12	540	41
1/2	28.5			50	8	400	43
3/4	33.3			35	6	210	33
1	38.1			20	6	120	33
1-1/4	44.5			20	4	80	32
1-1/2	49.3			10	6	60	30
2	57.2			8	4	32	28
2-1/2	70.0			6	3	18	26
3	81.0			7	2	14	28
3-1/2	90.0					6	20
4	99.0					6	21
5	113.0					2	12
6	132.0					2	16

**FIG. 90R
RED. ELBOWS (RL)**




SIZE (INCH)	a	b (mm.)	c	PCS/ INNER	QTY OF INNER	PCS/ MASTER	WT/ MASTER KGS.
1/4x1/8	18.8	19.3		40	B12	480	22
3/8x1/8	20.5	21.6		70	12	840	46
3/8x1/4	22.4	22.9		60	12	720	47
1/2x1/8	22.0	23.4		40	12	480	39
1/2x1/4	24.6	24.9		40	12	480	41
1/2x3/8	26.4	26.2		50	8	400	38
3/4x1/8	24.1	26.0		50	8	400	44
3/4x1/4	26.7	27.4		40	8	320	41
3/4x3/8	28.5	28.7		25	12	300	40
3/4x1/2	30.5	31.0		30	8	240	35
1x1/8	26.2	29.7					
1x1/4	28.2	31.0		40	6	240	
1x3/8	30.0	32.3		40	6	240	43
1x1/2	32.0	35.5		30	6	180	36
1x3/4	34.8	36.8		25	6	150	35
1-1/4x3/8	32.8	36.6		80	2	160	44
1-1/4x1/2	34.0	38.9		35	4	140	40
1-1/4x3/4	36.8	41.2		15	8	120	37
1-1/4x1	40.1	42.4		10	8	80	28
1-1/2x3/8	33.8	39.0		30	4	120	40
1-1/2x1/2	35.8	42.2		25	4	100	33
1-1/2x3/4	38.6	44.5		15	6	90	42
1-1/2x1	41.9	45.7		10	8	80	34
1-1/2x1-1/4	46.2	47.8		15	4	60	29
2x1/2	37.3	43.4		15	4	60	30
2x3/4	40.6	50.0		10	6	60	31
2x1	43.5	50.5		14	4	56	32
2x1-1/4	48.3	53.3		10	4	40	27
2x1-1/2	51.3	54.9		10	4	40	29
2-1/2x3/4	43.8	59.4		10	4	40	36
2-1/2x1	47.5	60.2		8	4	32	31
2-1/2x1-1/4	51.8	62.2		8	3	24	25
2-1/2x1-1/2	54.9	63.8		8	3	24	28
2-1/2x2	60.7	66.0		8	3	24	30
3x1-1/2	57.9	71.0		5	4	20	29
3x2	64.0	73.4		6	3	18	26
3x2-1/2	71.9	75.9		8	2	16	31
4x2	69.0	88.5				12	28
4x2-1/2	81.0	91.0				8	24
4x3	83.8	91.4				9	29

**FIG. 92
STREET ELBOWS 90° (SL 90)**




SIZE (INCH)	a	b (mm.)	c	PCS/ INNER	QTY OF INNER	PCS/ MASTER	WT/ MASTER KGS.
1/8	17.5	25.4		60	B12	720	20
1/4	20.6	30.2		35	B12	420	19
3/8	24.1	36.6		40	12	480	34
1/2	28.5	41.2		60	6	360	39
3/4	33.3	48.0		35	6	210	33
1	38.1	54.4		30	4	120	33
1-1/4	44.5	62.2		25	3	75	31
1-1/2	49.3	68.3		9	6	54	29
2	57.2	82.8		10	3	30	26
2-1/2	70.0	98.0		9	2	18	29
3	81.0	114.6		7	2	14	34
4	99.0	144.5				6	25
5	113.0	174.2					
6	132.0	204.0				2	

**FIG. 120
ELBOWS 45° (L 45)**




SIZE (INCH)	a	b (mm.)	c	PCS/ INNER	QTY OF INNER	PCS/ MASTER	WT/ MASTER KGS.
1/8	17.0			50	B12	600	18
1/4	18.5			30	B12	360	19
3/8	20.3			50	12	600	42
1/2	22.4			50	8	400	40
3/4	24.9			40	6	240	38
1	28.5			20	6	120	31
1-1/4	32.8			20	4	80	30
1-1/2	36.3			10	6	60	30
2	42.7			12	3	36	26
2-1/2	49.5			9	3	27	36
3	55.1			10	2	20	33
4	66.3					6	19
5	77.5					6	23
6	87.9					2	13

**FIG. 121
STREET ELBOWS 45° (SL 45)**




SIZE (INCH)	a	b (mm.)	c	PCS/ INNER	QTY OF INNER	PCS/ MASTER	WT/ MASTER KGS.
1/8	17.0	21.0		70	B12	840	23
1/4	18.5	23.9		40	B12	480	22
3/8	20.3	26.2		50	12	600	42
1/2	22.4	29.2		75	6	450	38
3/4	24.9	32.8		40	6	240	36
1	28.5	37.3		25	6	150	33
1-1/4	32.8	43.4		10	8	80	27
1-1/2	36.3	47.8		10	6	60	28
2	42.7	56.4		12	3	36	27
2-1/2	49.5	65.3		12	2	24	32
3	55.1	76.2		9	2	18	36
4	66.3	94.0				7	25

**FIG. 130R
RED. TEES (RT)**

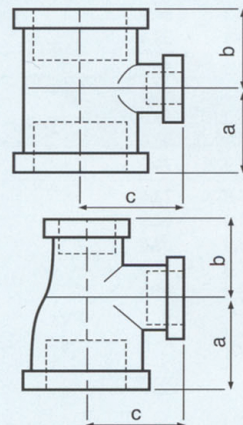

SIZE (INCH)	a	b (mm.)	c	PCS/ INNER	QTY OF INNER	PCS/ MASTER	WT/ MASTER KGS.
1/4x1/8	18.8	18.8	19.3	25	12	300	19
3/8x1/8	20.6	20.6	21.6	40	12	480	37
3/8x1/4	22.4	22.4	22.9	40	12	480	44
1/2x1/8	22.8	22.8	23.8	30	12	360	40
1/2x1/4	24.6	24.6	24.9	25	12	300	34
1/2x3/8	26.4	26.4	26.2	45	6	270	39
3/4x1/8	24.8	24.8	26.8	30	8	240	39
3/4x1/4	26.7	26.7	27.4	25	8	200	36
3/4x3/8	28.5	28.5	28.7	30	6	180	34
3/4x1/2	30.5	30.5	31.0	30	6	180	36
1x1/4	28.2	28.2	31.0	25	6	150	41
1x3/8	30.0	30.0	32.3	20	6	120	33
1x1/2	32.0	32.0	35.5	15	8	120	36
1x3/4	34.8	34.8	36.8	25	4	100	33
1-1/4x3/8	32.0	32.0	36.6				

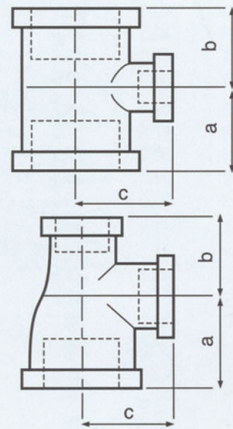**FIG. 130R
RED. TEES (RT)**


SIZE (INCH)	a	b (mm.)	c	PCS/ INNER	QTY OF INNER	PCS/ MASTER	WT/ MASTER KGS.
1-1/4x1/2	34.0	34.0	38.9	20	4	80	34
1-1/4x3/4	36.8	36.8	41.2	12	6	72	35
1-1/4x1	40.1	40.1	42.4	16	4	64	33
1-1/2x1/4	31.0	31.0	38.0	18	4	72	33
1-1/2x1/2	35.8	35.8	42.2	18	4	72	37
1-1/2x3/4	38.6	38.6	44.5	10	6	60	31
1-1/2x1	41.9	41.9	45.7	13	4	52	34
1-1/2x1-1/4	46.2	46.2	47.8	15	3	45	33
2x1/2	37.9	37.9	47.8	10	4	40	40
2x3/4	40.6	40.6	50.0	10	4	40	31
2x1	43.9	43.9	51.3	12	3	36	30
2x1-1/4	48.3	48.3	53.3	8	4	32	28
2x1-1/2	51.3	51.3	54.9	8	4	32	31
2-1/2x1/2	41.0	41.0	57.0	8	3	24	31
2-1/2x3/4	44.2	44.2	58.9	8	3	24	30
2-1/2x1	47.5	47.5	60.2	8	3	24	34
2-1/2x1-1/4	51.8	51.8	62.2	10	2	20	29
2-1/2x1-1/2	54.9	54.9	63.8	5	3	15	23
2-1/2x2	60.7	60.7	66.0	8	2	16	28
3x1/2	43.0	43.0	65.7	6	3	18	28
3x3/4	47.5	47.5	66.3	6	3	18	27
3x1	50.8	50.8	67.6	5	3	15	25
3x1-1/4	55.1	55.1	69.6	6	2	12	21
3x1-1/2	58.2	58.2	71.1	6	2	12	21
3x2	64.0	64.0	73.4	6	2	12	25
3x2-1/2	71.9	71.9	76.0	6	2	12	29
4x1/2	50.0	50.0	79.0			10	25
4x3/4	57.0	57.0	80.5			10	27
4x1	57.0	57.0	82.5			8	22
4x1-1/4	60.5	60.5	86.5			8	24
4x1-1/2	63.8	63.8	84.3			8	24
4x2	69.6	69.6	86.6			8	28
4x2-1/2	77.5	77.5	89.2			6	23
4x3	83.8	83.8	91.4			6	24
5x3	87.0	87.0	107.0			3	17
6x2	78.2	78.2	115.8			2	15
6x2-1/2	86.1	86.1	118.4			2	16
6x3	92.5	92.5	120.7			2	16
6x4	104.9	104.9	125.5			2	18
3/4x1/2x1/2	30.5	28.5	31.0	30	6	180	35
3/4x3/8x3/4	33.3	28.7	33.3	40	4	160	35
3/4x1/2x3/4	33.3	31.0	33.3	40	4	160	35
3/4x1/2x1	34.8	33.0	34.0	35	4	140	37
1x1/2x1/2	32.0	28.5	35.5	20	6	120	28
1x1/2x3/4	34.8	31.0	36.8	20	6	120	30
1x1/2x1	38.1	35.5	38.1	15	6	90	21
1x3/4x1/2	32.0	30.5	35.3	20	6	120	32
1x3/4x3/4	34.8	33.3	36.8	25	4	100	31
1x3/4x1	38.1	36.8	38.1	15	6	90	22
1-1/4x1/2x1/2	34.0	32.0	34.4	25	4	100	33
1-1/4x1/2x3/4	48.0	42.5	53.8	25	4	100	34
1-1/4x1/2x1	40.1	34.5	42.4	20	4	80	33
1-1/4x1/2x1-1/4	44.5	38.9	44.5	10	6	60	30
1-1/4x3/4x1/2	33.8	29.3	38.3	25	4	100	32
1-1/4x3/4x3/4	36.8	33.3	41.2	10	8	80	30
1-1/4x3/4x1	40.1	36.8	42.4	10	8	80	32
1-1/4x3/4x1-1/4	44.5	41.2	44.5	10	6	60	31
1-1/4x1x1/2	34.0	32.0	38.9	18	4	72	28
1-1/4x1x3/4	36.8	34.8	41.2	18	4	72	29
1-1/4x1x1	40.1	38.1	42.4	18	4	72	34
1-1/4x1x1-1/4	44.5	42.4	44.5	10	6	60	33
1-1/2x1/2x1/2	35.0	27.4	42.3	20	4	80	31
1-1/2x1/2x3/4	38.6	31.0	44.5	20	4	80	
1-1/2x1/2x1	41.0	32.8	45.5	18	4	72	31
1-1/2x1/2x1-1/4	49.3	42.2	47.8	15	4	60	
1-1/2x1/2x1-1/2	49.3	42.2	49.3	12	4	48	33
1-1/2x3/4x1/2	35.0	29.0	42.3	20	4	80	29
1-1/2x3/4x3/4	37.9	31.9	43.3	18	4	72	31
1-1/2x3/4x1	41.9	36.9	45.7	15	4	60	34
1-1/2x3/4x1-1/4	38.0	29.5	43.5	15	4	60	35
1-1/2x3/4x1-1/2	49.3	44.5	49.3	12	4	48	32
1-1/2x1x1/2	35.0	32.3	42.3	18	4	72	30



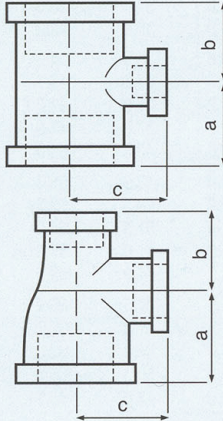
FIG. 130R RED. TEES (RT)		SIZE (INCH)	a	b (mm.)	c	PCS/ INNER	QTY OF INNER	PCS/ MASTER	WT/ MASTER KGS.
		1-1/2x1x3/4	41.2	33.8	49.4	15	4	60	29
		1-1/2x1x1	41.9	38.1	45.7	15	4	60	32
		1-1/2x1x1-1/4	46.2	42.4	47.8	14	4	56	36
		1-1/2x1x1-1/2	49.3	45.7	49.3	14	4	56	41
		1-1/2x1-1/4x1/2	35.8	34.0	42.2	8	8	64	30
		1-1/2x1-1/4x3/4	38.6	36.3	44.5	8	8	64	33
		1-1/2x1-1/4x1	41.9	40.1	45.7	14	4	56	33
		1-1/2x1-1/4x1-1/4	46.2	44.5	47.8	12	4	48	32
		1-1/2x1-1/4x1-1/2	49.3	47.8	49.3	10	4	40	29
		1-1/2x1-1/4x2	55.0	54.0	52.5	15	2	30	29
		2x1/2x1/2	37.8	27.0	48.7	12	4	48	27
		2x1/2x2	57.2	47.8	57.2	8	4	32	29
		2x3/4x2	57.2	50.0	57.2	8	4	32	24
		2x1x1/2	38.0	31.0	48.4	12	4	48	27
		2x1x3/4	41.2	33.0	49.0	12	4	48	27
		2x1x1	44.8	38.3	52.4	12	4	48	31
		2x1x1-1/4	47.8	42.1	54.2	10	4	40	33
		2x1x1-1/2	51.3	45.7	54.9	10	4	40	35
		2x1x2	57.2	51.3	57.2	8	4	32	33
		2x1-1/4x1/2	38.0	34.0	50.0	10	4	40	
		2x1-1/4x3/4	41.0	38.0	49.3	10	4	40	
		2x1-1/4x1	45.0	40.6	52.0	10	4	40	28
		2x1-1/4x1-1/4	48.3	44.5	53.3	6	6	36	30
		2x1-1/4x1-1/2	51.3	47.8	54.9	8	4	32	33
		2x1-1/4x2	57.2	53.3	57.2	13	2	26	27
		2x1-1/2x1/2	46.3	45.7	48.4	10	4	40	32
		2x1-1/2x1	43.9	41.9	51.3	10	4	40	30
		2x1-1/2x1-1/4	48.3	46.2	53.3	8	4	32	27
		2x1-1/2x1-1/2	51.3	49.3	54.9	8	4	32	29
		2x1-1/2x2	57.2	54.8	57.2	10	3	30	27
		2-1/2x1-1/2x2-1/2	69.2	63.8	68.5			16	32
		2-1/2x2x1-1/2	60.7	57.2	63.8				
		2-1/2x2x2-1/2	68.6	66.0	68.6			16	33
		3x2x2	64.0	57.2	73.4			12	23
FIG. 130R BULL HEAD TEE (BHT)		SIZE (INCH)	a	b (mm.)	c	PCS/ INNER	QTY OF INNER	PCS/ MASTER	WT/ MASTER KGS.
		3/8x3/8x1/2	26.2	26.2	26.4	45	6	270	33
		1/2x1/2x3/4	31.0	31.0	30.5	30	6	180	34
		1/2x1/2x1	34.6	34.6	32.0	40	4	160	39
		3/4x3/4x1	36.8	36.8	34.8	20	6	120	33
		3/4x3/4x1-1/4	41.2	41.2	36.8	25	4	100	38
		1x1x1-1/4	42.4	42.4	40.1	15	4	60	31
		1x1x1-1/2	45.7	45.7	41.9	15	4	60	34
		1x1x2	51.3	51.3	48.9	12	4	48	
		1-1/4x1-1/4x1-1/2	47.8	47.8	46.2	14	4	56	32
		1-1/4x1-1/4x2	53.3	53.3	48.3	8	4	32	28
		1-1/2x1-1/2x2	54.9	54.9	51.3	8	4	32	31
		2x2x2-1/2	66.0	66.0	60.7	8	2	16	26
		2-1/2x2-1/2x3	76.0	76.0	71.9	6	2	12	32
FIG. 130 TEES (T)		SIZE (INCH)	a	b (mm.)	c	PCS/ INNER	QTY OF INNER	PCS/ MASTER	WT/ MASTER KGS.
		1/8	17.5			80	12	960	44
		1/4	20.6			50	12	600	39
		3/8	24.1			30	12	360	37
		1/2	28.5			40	6	240	35
		3/4	33.3			35	4	140	32
		1	38.1			20	4	80	30
		1-1/4	44.5			14	4	56	32
		1-1/2	49.3			15	3	45	31
		2	57.2			10	3	30	33
		2-1/2	69.0			8	2	16	35
		3	81.0			6	2	12	32
		3-1/2	90.0					6	28
		4	99.0					6	29
		5	113.0					3	22
		6	132.0					2	23









FIG. 134 STREET TEES (ST)		SIZE (INCH)	a	b (mm.)	c	PCS/ INNER	QTY OF INNER	PCS/ MASTER	WT/ MASTER KGS.
		1/2	28.5		41.2	40	6	240	38
		3/4	33.3		48.0	35	4	140	33
		1	38.1		54.4	20	4	80	31
		1-1/2	49.3		68.3	15	3	45	36
		2	57.2		82.8	10	3	30	41
FIG. 165 LATERAL Y BRANCH, 45° (Y 45)		SIZE (INCH)	a	b (mm.)	c	PCS/ INNER	QTY OF INNER	PCS/ MASTER	WT/ MASTER KGS.
		1/2	17.0	53.0	53.0	25	4	100	24
		3/4	20.0	64.0	64.0	15	4	60	21
		1	22.2	74.0	74.0	15	4	60	32
		1-1/4	30.0	89.0	89.0	18	2	36	31
		1-1/2	34.0	96.0	96.0			45	
		2	40.0	113.0	113.0				
FIG. 180 CROSSES (CR)		SIZE (INCH)	a	b (mm.)	c	PCS/ INNER	QTY OF INNER	PCS/ MASTER	WT/ MASTER KGS.
		1/8	17.5			30	B12	360	19
		1/4	20.6			40	12	480	43
		3/8	24.1			25	12	300	39
		1/2	28.5			30	6	180	32
		3/4	33.3			20	6	120	36
		1	38.1			15	4	60	28
		1-1/4	44.5			20	2	40	29
		1-1/2	49.3			18	2	36	31
		2	57.2			10	2	20	26
		2-1/2	69.0					12	30
		3	81.0					8	24
		4	99.0					4	22
5	113.0								
6	132.0					2			
FIG. 221 SIDE OUTLET ELBOWS (SOL)		SIZE (INCH)	a	b (mm.)	c	PCS/ INNER	QTY OF INNER	PCS/ MASTER	WT/ MASTER KGS.
		1/2	28.5			45	6	270	42
		3/4	34.0			20	8	160	38
		1	38.0			20	4	80	32
		1-1/4	44.5			15	3	45	27
		1-1/2	49.3			12	3	36	27
		2	57.0			12	2	24	31
FIG. 223 SIDE OUTLET TEES (SOT)		SIZE (INCH)	a	b (mm.)	c	PCS/ INNER	QTY OF INNER	PCS/ MASTER	WT/ MASTER KGS.
		1/2	28.5			25	8	200	37
		3/4	34.0			15	8	120	36
		1	38.0			25	3	75	34
		1-1/4	44.5			12	3	36	26
		1-1/2	49.3			10	3	30	28
		2	57.0			10	2	20	25

FIG. 240
RED. COUPLING (RED. SOCKETS) (RS)




SIZE (INCH)	a	b (mm.)	c	PCS/ INNER	QTY OF INNER	PCS/ MASTER	WT/ MASTER KGS.
1/4x1/8	29.8			50	B12	600	23
3/8x1/8	28.7			35	B12	420	21
3/8x1/4	28.7			30	B12	360	19
1/2x1/8	31.8			50	12	600	38
1/2x1/4	31.8			50	12	600	44
1/2x3/8	31.8			40	12	480	36
3/4x1/8	36.6			35	12	420	45
3/4x1/4	36.6			30	12	360	36
3/4x3/8	36.6			30	12	360	42
3/4x1/2	36.6			60	6	360	43
1x1/4	42.9			45	6	270	39
1x3/8	42.9			30	8	240	36
1x1/2	42.9			30	8	240	40
1x3/4	42.9			25	8	200	38
1-1/4x3/8	52.3			30	8	240	53
1-1/4x1/2	52.3			25	6	150	37
1-1/4x3/4	52.3			25	6	150	40
1-1/4x1	52.3			15	8	120	34
1-1/2x3/8	54.0			20	6	120	28
1-1/2x1/2	54.0			20	6	120	55
1-1/2x3/4	58.7			15	8	120	41
1-1/2x1	58.7			25	4	100	37
1-1/2x1-1/4	58.7			12	8	96	36
2x1/4	58.0			15	6	90	35
2x3/8	58.0			15	6	90	39
2x1/2	58.0			14	6	84	37
2x3/4	58.0			14	6	84	38
2x1	71.4			28	3	84	39
2x1-1/4	71.4			18	4	72	35
2x1-1/2	71.4			24	3	72	37
2-1/2x1/2	65.0			20	2	40	31
2-1/2x3/4	65.0			20	2	40	31
2-1/2x1	65.0			20	2	40	29
2-1/2x1-1/4	65.0			20	2	40	31
2-1/2x1-1/2	65.0			20	2	40	30
2-1/2x2	65.0			20	2	40	37
3x1/2	75.0			16	2	32	36
3x3/4	75.0			16	2	32	31
3x1	75.0			16	2	32	30
3x1-1/4	75.0			16	2	32	33
3x1-12	75.0			16	2	32	33
3x2	75.0			16	2	32	32
3x2-1/2	75.0			12	2	24	30
4x1/2	85.0						
4x3/4	85.0						
4x1	85.0			6	3	18	27
4x1-1/4	85.0			6	3	18	30
4x1-1/2	85.0			6	3	18	30
4x2	85.0			6	3	18	30
4x2-1/2	85.0			6	3	18	30
4x3	85.0			6	3	18	34
5x2	96.0						
5x3	96.0						
5x4	96.0					10	29
6x2	104.0					8	
6x3	104.0					8	
6x4	104.0					8	
6x5	104.0					6	26

**FIG. 241
BUSHINGS (BU)**


Note :
C : Width of Head

SIZE (INCH)	a	b (mm.)	c	PCS/ INNER	QTY OF INNER	PCS/ MASTER	WT/ MASTER KGS.
1/4x1/8	18.0		23.0	120	B12	1,440	20
3/8x1/8	19.0		26.0	75	B12	900	19
3/8x1/4	19.0		26.0	75	B12	900	17
1/2x1/8	22.0		31.0	100	12	1,200	51
1/2x1/4	22.0		31.0	100	12	1,200	47
1/2x3/8	22.0		31.0	100	12	1,200	47
3/4x1/8	24.0		33.0	50	12	600	44
3/4x1/4	24.0		33.0	50	12	600	43
3/4x3/8	24.0		33.0	50	12	600	39
3/4x1/2	24.0		33.0	50	12	600	35
1x1/8	19.2	29.8	28.5				
1x1/4	19.2	29.8	28.5	50	8	400	48
1x3/8	19.2	29.8	28.5	50	8	400	49
1x1/2	29.5		40.0	50	8	400	41
1x3/4	29.5		40.0	50	8	400	34
1-1/4x1/8	20.3	32.9	28.5	30	8	240	37
1-1/4x1/4	20.3	32.9	28.5	30	8	240	61
1-1/4x3/8	20.3	32.9	28.5	30	8	240	37
1-1/4x1/2	20.3	32.9	34.0	30	8	240	48
1-1/4x3/4	26.0		45.0	30	8	240	41
1-1/4x1	28.0		45.0	30	8	240	34
1-1/2x1/4	17.2	30.2	29.7	25	6	150	38
1-1/2x3/8	17.2	30.2	29.7	25	6	150	28
1-1/2x1/2	31.0		50.0	25	6	150	42
1-1/2x3/4	21.0	35.4	41.5	25	6	150	43
1-1/2x1	30.0		55.2	25	6	150	36
1-1/2x1-1/4	30.0		55.2	25	6	150	26
2x1/4	22.5	38.0	28.5	20	6	120	43
2x3/8	22.5	38.0	28.5	20	6	120	47
2x1/2	22.5	38.0	34.0	20	6	120	50
2x3/4	22.5	38.0	41.5	20	6	120	37
2x1	22.5	38.0	49.5	20	6	120	49
2x1-1/4	35.0		63.7	20	6	120	44
2x1-1/2	35.0		63.7	20	6	120	37
2-1/2x1/2	28.0	44.2	34.0	15	4	60	44
2-1/2x3/4	28.0	44.5	42.0	15	4	60	38
2-1/2x1	28.0	38.5	50.0	15	4	60	43
2-1/2x1-1/4	38.5		75.7	15	4	60	40
2-1/2x1-1/2	38.5		75.7	15	4	60	39
2-1/2x2	36.6		75.7	15	4	60	29
3x1/2	44.0		95.0	12	4	48	48
3x3/4	44.0		95.0	12	4	48	48
3x1	44.0		95.0	12	4	48	50
3x1-1/4	44.0		95.0	12	4	48	55
3x1-1/2	44.0		95.0	12	4	48	51
3x2	44.0		95.0	12	4	48	48
3x2-1/2	44.0		95.0	12	4	48	37
3-1/2x1-1/2	30.0	43.5	68.0	8	4	32	33
3-1/2x2	30.0	43.5	84.0	8	4	32	33
3-1/2x3	41.0		117.3	8	4	32	30
4x1/2	51.0		117.3				
4x3/4	51.0		117.3				
4x1	51.0		117.3	5	4	20	36
4x1-1/4	51.0		117.3	5	4	20	38
4x1-1/2	51.0		117.3	5	4	20	32
4x2	51.0		117.3	5	4	20	33
4x2-1/2	29.4	52.7	98.3	5	4	20	34
4x3	51.0		117.3	5	4	20	31
5x4	57.0		150.0	5	2	10	23
6x2	64.0		170.0	2	4	8	34
6x2-1/2	64.0		170.0				
6x3	64.0		170.0	2	4	8	36
6x4	64.0		170.0	2	4	8	33
6x5	64.0		170.0	5	2	10	29


**FIG. 245
RED. HEX. NIPPLES (RNI)**



Note :
C : Spanner width


SIZE (INCH)	a	b (mm.)	c	PCS/ INNER	QTY OF INNER	PCS/ MASTER	WT/ MASTER KGS.
3/8x1/4	38.0		19.0	60	6	360	15
1/2x1/4	44.0		24.0	60	12	720	41
1/2x3/8	44.0		26.0	70	8	560	40
3/4x3/8	47.0		30.0	50	8	400	38
3/4x1/2	47.0		30.0	50	8	400	43
1x1/2	53.0		36.0	50	6	300	45
1x3/4	53.0		38.0	40	6	240	41
1-1/4x1/2	57.0		46.0	30	6	180	45
1-1/4x3/4	57.0		46.0	20	8	160	38
1-1/4x1	57.0		46.0	35	4	140	35
1-1/2x1/2	59.0		50.0	15	6	90	24
1-1/2x3/4	59.0		50.0	15	6	90	25
1-1/2x1	59.0		50.0	15	6	90	27
1-1/2x1-1/4	59.0		50.0	25	4	100	32
2x3/4	68.0		65.0				
2x1	68.0		65.0	5	8	40	19
2x1-1/4	68.0		65.0	18	4	72	34
2x1-1/2	68.0		65.0	18	4	72	33
2-1/2x1-1/2	75.0		80.0	20	2	40	28
2-1/2x2	75.0		80.0	20	2	40	29
3x2	83.0		94.0	12	2	24	26
3x2-1/2	83.0		94.0	12	2	24	23
4x2	92.0		120.0	10	2	20	37
4x3	92.0		120.0	10	2	20	35

**FIG. 246
EXTENSION PIECES (X)**




SIZE (INCH)	a	b (mm.)	c	PCS/ INNER	QTY OF INNER	PCS/ MASTER	WT/ MASTER KGS.
3/8	32.0			40	B12	480	22
1/2	41.0			50	12	600	55
3/4	48.5			40	8	320	42
1	56.0			30	6	180	35
1-1/4	60.0			30	4	120	36
1-1/2	65.0			20	4	80	31
2	71.0			15	4	60	36

**FIG. 270
COUPLINGS (SOCKETS) (S)**




SIZE (INCH)	a	b (mm.)	c	PCS/ INNER	QTY OF INNER	PCS/ MASTER	WT/ MASTER KGS.
1/8	24.4			70	B12	840	23
1/4	26.9			40	B12	480	21
3/8	29.5			50	12	600	36
1/2	34.0			40	12	480	40
3/4	39.0			50	6	300	38
1	42.4			25	6	150	31
1-1/4	49.0			16	8	128	38
1-1/2	54.6			18	4	72	28
2	64.3			12	4	48	28
2-1/2	73.2			8	4	32	35
3	80.8			8	3	24	30
4	93.7			7	2	14	30
6	105.0					2	9


**FIG. 280
HEXAGON NIPPLES (NI)**


Note :
C : Spanner width

SIZE (INCH)	a	b (mm.)	c	PCS/ INNER	QTY OF INNER	PCS/ MASTER	WT/ MASTER KGS.
1/8	29.0		14.0	200	12	2,400	42
1/4	36.0		18.0	150	12	1,800	57
3/8	38.0		22.0	80	12	960	47
1/2	44.0		25.0	50	12	600	39
3/4	48.0		32.0	40	8	320	39
1	52.0		38.0	40	6	240	43
1-1/4	57.0		46.0	20	8	160	37
1-1/2	59.0		54.0	30	4	120	44
2	68.0		68.0	20	3	60	30
2-1/2	75.0		82.0	20	2	40	32
3	83.0		94.0	12	2	24	24
4	95.0		120.0			20	33
5	104.0		145.0			12	36
6	117.0		170.0			6	26

**FIG. 291
PLUGS (P)**


SIZE (INCH)	a	b (mm.)	c	PCS/ INNER	QTY OF INNER	PCS/ MASTER	WT/ MASTER KGS.
1/8		15.4	7.0	300	B12	3,600	26
1/4		18.2	9.5	150	B12	1,800	24
3/8		20.2	11	100	B12	1,200	31
1/2		24.1	14.2	50	B12	600	27
3/4		27.1	15.8	30	B12	360	25
1		31.8	20.6	20	B12	240	23
1-1/4		34.5	23.8	40	6	240	34
1-1/2		36.0	26.5	30	6	180	33
2		40.0	33.3	20	6	120	36
2-1/2		49.0	42.0	16	4	64	40
3		52.0	47.0	16	3	48	36
3-1/2		54.0	49.0	16	2	32	37
4		64.0	58.0	8	2	16	28
5		70.0	68.5	8	2	16	38
6		73.0	76.5			10	30

**FIG. 301
CAPS (CA)**


SIZE (INCH)	a	b (mm.)	c	PCS/ INNER	QTY OF INNER	PCS/ MASTER	WT/ MASTER KGS.
1/8	14.0			120	B12	1,440	25
1/4	15.0			80	B12	960	26
3/8	18.8			60	B12	720	32
1/2	22.2			75	12	900	54
3/4	24.6			40	12	480	44
1	29.5			35	8	280	46
1-1/4	32.5			25	8	200	48
1-1/2	33.8			25	6	150	47
2	36.8			18	6	108	44
2-1/2	43.2			28	2	56	44
3	45.7			21	2	42	41
4	52.8			7	3	21	36
5	58.9					19	45
6	64.8					11	38

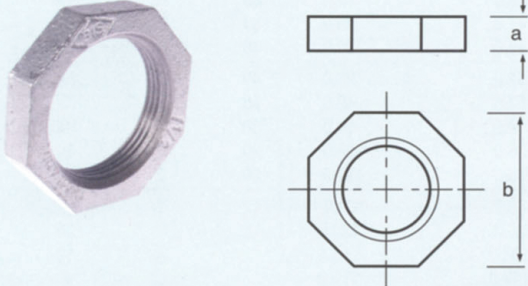
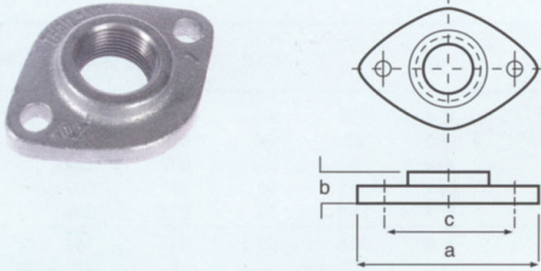
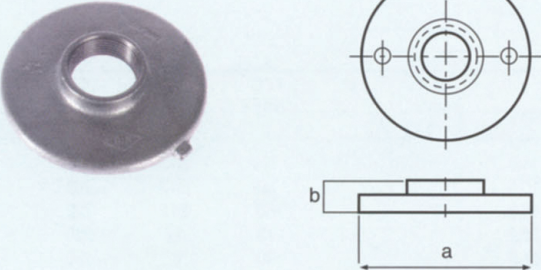
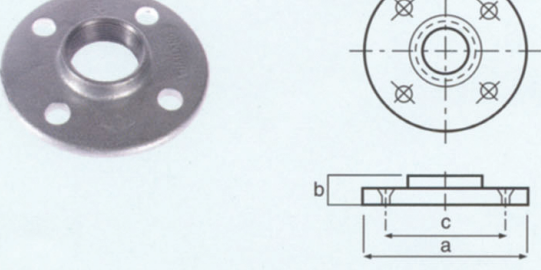





FIG. 312 LOCKNUTS (LN)		SIZE (INCH)	a	b (mm.)	c	PCS/ INNER	QTY OF INNER	PCS/ MASTER	WT/ MASTER KGS.
		1/4	7.5	22.0					
		3/8	8.0	27.0		125	12	1,500	39
		1/2	8.0	32.0		100	12	1,200	45
		3/4	9.0	36.0		60	12	720	40
		1	10.0	46.0		40	12	480	41
		1-1/4	12.0	55.0		30	12	360	42
		1-1/2	12.0	60.0		45	6	270	42
		2	13.0	75.0		25	6	150	37
		2-1/2	17.0	99.7		28	3	84	40
		3	18.0	113.5		20	3	60	38
		4	22.0	145.0		14	2	28	33
		5	22.0	165.0		10	2	20	25
		6	30.0	200.0		6	2	12	34
FIG. (320) OVAL FLANGES (OF)		SIZE (INCH)	a	b (mm.)	c	PCS/ INNER	QTY OF INNER	PCS/ MASTER	WT/ MASTER KGS.
		1/2	80.0	17.0	55.0	25	8	200	55
		1-1/4	120.0	22.0	90.0	15	6	90	50
		2	140.0	24.0	110.0	8	6	48	33
FIG. 321A FLOOR FLANGES WITHOUT HOLES (BF)		SIZE (INCH)	a	b (mm.)	c	PCS/ INNER	QTY OF INNER	PCS/ MASTER	WT/ MASTER KGS.
		1/8	50.0	8.3					
		1/4	64.2	8.5		30	8	240	25
		3/8	75.0	10.0		25	8	200	28
		1/2	95.0	12.0		25	8	200	56
		3/4	102.0	14.0		20	8	160	46
		1	114.0	16.0		20	6	120	46
		1-1/4	120.0	18.0		15	6	90	34
		1-1/2	133.0	19.0		12	6	72	35
		2	152.0	21.0		8	6	48	33
		2-1/2	164.5	24.0		20	2	40	49
		3	184.0	26.0		5	6	30	52
		4	216.0	30.0				12	31
		5	254.0	32.0				8	31
		6	280.0	35.0				8	38
FIG. 321B FLOOR FLANGES 4 HOLES (AFF)		SIZE (INCH)	a	b (mm.)	c	PCS/ INNER	QTY OF INNER	PCS/ MASTER	WT/ MASTER KGS.
		1/4	60.0	8.6	40.0	30	8	240	25
		3/8	68.0	12.0	46.0	25	8	200	28
		1/2	76.0	12.5	52.0	25	8	200	56
		3/4	82.5	14.0	58.0	20	8	160	46
		1	94.4	19.0	70.2	20	6	120	46
		1-1/4	101.4	19.0	76.7	15	6	90	34
		1-1/2	112.7	23.5	84.0	12	6	72	33
		2	129.3	25.3	100.0	8	6	42	33

FIG. 321 C FLOOR FLANGES		SIZE (INCH)	a	b (mm.)	c	PCS/ INNER	QTY OF INNER	PCS/ MASTER	WT/ MASTER KGS.
   (FD 4 HOLES 1/2-4", 8 HOLES 6") (FE 4 HOLES 1/2-3", 8 HOLES 4", 6")		1/2	95.5	12.0	67.0	25	8	200	56
		3/4	102.0	14.0	73.0	20	8	160	46
		1	114.0	16.0	82.0	20	6	120	46
		1-1/4	120.0	18.0	87.0	15	6	90	34
		1-1/2	133.0	19.0	98.0	12	6	72	35
		2	152.0	21.0	114.0	8	6	48	33
		2-1/2	165.0	24.0	127.0	20	2	40	49
		3	184.0	26.0	146.0	5	6	30	52
		4	216.0	30.0	178.0			12	31
		5	254.0	32.0	209.0				
		6	280.0	35.0	235.0			8	38
FIG. 330 UNION FLAT SEAT (U)		SIZE (INCH)	a	b (mm.)	c	PCS/ INNER	QTY OF INNER	PCS/ MASTER	WT/ MASTER KGS.
  Note : C : Spanner width		1/8	29.5		25.0	30	12	360	22
		1/4	33.2		31.0	20	12	240	22
		3/8	38.0		37.0	20	12	240	36
		1/2	40.8		43.0	50	4	200	40
		3/4	49.0		50.0	35	4	140	41
		1	54.5		60.0	20	4	80	35
		1-1/4	60.5		70.5	15	4	60	43
		1-1/2	67.5		79.0	10	4	40	33
		2	75.5		94.5	6	4	24	30
		2-1/2	85.0		113.0	8	2	16	34
		3	93.5		128.0	7	2	14	39
		4	115.0		159.0			7	34
		6	139.0		219.0			4	39
FIG. 340 UNION CONICAL JOINT IRON TO IRON FEMALE (EU)		SIZE (INCH)	a	b (mm.)	c	PCS/ INNER	QTY OF INNER	PCS/ MASTER	WT/ MASTER KGS.
  Note : C : Spanner width		3/8	44.0		36.0	20	12	240	39
		1/2	48.0		41.0	50	4	200	33
		3/4	52.0		50.0	35	4	140	39
		1	58.0		55.0	20	4	80	27
		1-1/4	66.0		70.0	15	4	60	37
		1-1/2	69.0		75.0	10	4	40	29
		2	78.0		90.0	6	4	24	28
		2-1/2	84.0		110.0	8	2	16	30
		3	95.0		130.0	7	2	14	39
		4	110.0		150.0			7	26
FIG. 350 UNION BRASS SEAT (AU)		SIZE (INCH)	a	b (mm.)	c	PCS/ INNER	QTY OF INNER	PCS/ MASTER	WT/ MASTER KGS.
 		1/8	29.5		25.0	30	12	360	22
		1/4	33.2		31.0	20	12	240	22
		3/8	38.0		37.0	20	12	240	36
		1/2	40.8		43.0	50	4	200	40
		3/4	49.0		50.0	35	4	140	41
		1	54.5		60.0	20	4	80	35
		1-1/4	60.5		70.5	15	4	60	43
		1-1/2	67.5		79.0	10	4	40	33
		2	75.5		94.5	6	4	24	30
		2-1/2	85.0		113.0	8	2	16	34
		3	93.5		128.0	7	2	14	39
		4	115.5		159.0			7	34
		6	139.0		219.0			4	39

Packing List A6

Fig No.	Abbr.	Description	1/8"	1/4"	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"
1	BMF90	Bends M&F 90		450		180	90	45	20	15	8	
2	BF90	Bends Female 90	240	220	200	150	80	40	20	14	7	
3	BM90	Bends Male 90				270	100	70	30	20	12	
40	BMF45	Bends M&F 45	320	300	400	200	110	70	30	25	14	
41	BF45	Female 45	320	300	300	150	90	50	30	20	10	
90	L90	Elbows 90	1,100	600	350	230	120	70	45	30	18	
92	SL90	Street Elbows 90	1,200	700	500	230	130	70	40	30	15	
120	L45	Elbows 45	900	630	400	250	150	90	45	30	20	
121	SL45	Street Elbows 45	320	650	500	300	180	100	50	35	18	
130	T	Tees	620	320	200	140	80	45	25	22	6	
131	PT	Pitchers Tees				80	60	30	20	15	6	
134	ST	Service Tees				150	80	45		21	12	
180	CR	Crosses	500	280	170	110	60	40	18	17	7	
221	SOL	Side Outlet Elbows	220	200	190	140	80	50	25	18	9	
223	SOT	Side Outlet Tees					60	40	20	12	6	
246	X	Extension Pieces			500	350	190	100	50	40	20	
270	S	Sockets	1,200	800	500	300	180	110	60	40	24	
280	NI	Hexagon Nipples		1,000	600	380	200	130	70	60	30	
291	P	Plugs	5,000	3,000	1,600	1,000	500	300	150	120	70	
301	CA	Caps	1,000	1,000	700	500	300	180	100	80	50	
312	LN	Locknuts			1,500	900	600	370	200	150	100	
320	OF	Oval Collar Flanges				200	120	108	50	40	40	
321A	F	Floor Flanges without hole	450	320	250	150	70	60	40	30	20	
321B	FD	Floor Flanges with 4 hole	450	270	200	150	70	60	40	30	20	
321C	FE	Floor Flanges with 8 hole										
330	UF	Unions Flat seat	350	250	200	130	60	50	30	25	14	
350	U	Unions Brass seat		350	200	130	60	50	30	25	14	

Dimension in cm	Carton	L 31.4	W 22.9	H 18.4
	Pallet	98	112	
	Cartons/pallet	70		

Pressure / Temperature Rating

Service Temperature		Maximum permissible working pressure	
°C	°F	BAR	PSI
-20 to 120	-4 to 248	25	362
120-300	248-572	interpolated values	
300	572	20	290



Thread designation and nominal size

inch	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	5	6
mm.	6	8	10	15	20	25	32	40	50	65	80	100	125	150

Abbr. Fig No.	RL 90R	RS 240	BU 241	RNI 245	Abbr. Fig No.	RT 130R	Abbr. Fig No.	RT 130R
1/4x1/8		1,000	1,200	750	1/4x1/4x1/8"	400	1-1/2x1-1/4x1-1/4"	20
3/8x1/8	450	500	1,000	700	3/8x3/8x1/8"	300	1-1/2x1-1/4x1-1/2"	20
3/8x1/4	450	500	1,000	700	3/8x3/8x1/4	300	1-1/2x1-1/4x2"	16
1/2x1/8	350	450	500	400	1/2x1/2x1/8"	200	1-1/2x1-1/2x1/4"	30
1/2x1/4	350	450	500	450	1/2x1/2x1/4"	150	1-1/2x1-1/2x1/2"	30
1/2x3/8	300	420	500	500	1/2x1/2x3/8"	150	1-1/2x1-1/2x3/4	30
3/4x1/8	130	200	350		1/2x1/2x3/4"	100	1-1/2x1-1/2x1"	30
3/4x1/4	170	200	350	250	1/2x1/2x1"	70	1-1/2x1-1/2x1-1/4"	25
3/4x3/8	170	200	350	230	3/4x3/8x3/4"	90	1-1/2x1-1/2x2"	16
3/4x1/2	150	200	350	230	3/4x1/2x1/2"	100	2x3/4x2"	22
1x1/8			250		3/4x1/2x3/4"	75	2x1x1/2"	20
1x1/4	110	160	250	180	3/4x1/2x1"	65	2x1x3/4"	20
1x3/8	120	150	250	150	3/4x3/4x1/8"	75	2x1x1"	20
1x1/2	100	120	250	150	3/4x3/4x1/4"	100	2x1x1-1/4"	16
1x3/4	100	110	250	150	3/4x3/4x3/8"	75	2x1x1-1/2"	16
1-1/4x1/8		80	130		3/4x3/4x1/2"	75	2x1x2"	16
1-1/4x1/4			130		3/4x3/4x1"	50	2x1-1/4x1/2"	25
1-1/4x3/8	50		130	100	1x1/2x1/2"	60	2x1-1/4x3/4"	25
1-1/4x1/2	55	70	130	90	1x1/2x3/4"	60	2x1-1/4x1"	20
1-1/4x3/4	55	70	130	80	1x1/2x1"	50	2x1-1/4x1-1/4"	15
1-1/4x1	50	70	130	80	1x3/4x1/2"	70	2x1-1/4x1-1/2"	15
1-1/2x1/4			90		1x3/4x3/4"	60	2x1-1/4x2"	16
1-1/2x3/8	50	60	150	60	1x3/4x1"	60	2x1-1/2x1/2"	16
1-1/2x1/2	50	60	120	60	1x1x1/4"	70	2x1-1/2x1"	16
1-1/2x3/4	45	60	120	60	1x1x3/8"	70	2x1-1/2x1-1/4"	16
1-1/2x1	35	50	120	60	1x1x1/2"	60	2x1-1/2x1-1/2"	16
1-1/2x1-1/4	30	40	120	60	1x1x3/4"	50	2x1-1/2x2"	15
2x1/4		36	90		1x1x1-1/4"	30	2x2x1/2"	24
2x3/8		35	90		1x1x1-1/2"	30	2x2x3/4"	22
2x1/2	25	36	50	36	1-1/4x1/2x1/2"	50	2x2x1"	16
2x3/4	25	36	50	36	1-1/4x1/2x3/4"	50	2x2x1-1/4"	16
2x1	25	36	50	36	1-1/4x1/2x1"	30	2x2x2-1/2"	15
2x1-1/4	20	30	50	35	1-1/4x1/2x1-1/4"	30	2x2x2-1/2"	9
2x1-1/2	20	24	50	35	1-1/4x3/4x1/2"	50	2-1/2x1-1/2x2-1/2"	6
2-1/2x1/2		20	40		1-1/4x3/4x3/4"	40	2-1/2x2x2-1/2"	6
2-1/2x3/4	15	20	40		1-1/4x3/4x1"	30	2-1/2x2-1/2x1/2"	10
2-1/2x1	15	20	40	24	1-1/4x3/4x1-1/4"	30	2-1/2x2-1/2x3/4"	10
2-1/2x1-1/4	12	20	40	24	1-1/4x1x1/2"	30	2-1/2x2-1/2x1"	10
2-1/2x1-1/2	12	16	40	24	1-1/4x1x3/4"	30	2-1/2x2-1/2x1-1/4"	10
2-1/2x2	10	16	40	24	1-1/4x1x1"	30	2-1/2x2-1/2x1-1/2"	10
3x1/2		16	18		1-1/4x1x1-1/4	25	2-1/2x2-1/2x2"	8
3x3/4		16	18		1-1/4x1-1/4x1/4"		2-1/2x2-1/2x3"	5
3x1		16	18	15	1-1/4x1-1/4x1/2"	40	2x1/2x1/2"	30
3x1-1/4	6	10	18	15	1-1/4x1-1/4x3/4"	40	2x1/2x2"	24
3x1-1/2	6	10	18	15	1-1/4x1-1/4x1"	30	3x2x2"	5
3x2	6	10	18	15	1-1/4x1-1/4x1+1/2"	16	3x3x1/2"	6
3x2-1/2	5	9	18	12	1-1/4x1-1/4x2"	16	3x3x3/4"	6
3-1/2x1-1/2			20		1-1/2x1/2x1/2"	35	3x3x1"	6
3-1/2x2			20		1-1/2x1/2x3/4"	35	3x3x1-1/4"	6
3-1/2x3			20		1-1/2x1/2x1"	35	3x3x1-1/2"	6
4x1		7	10		1-1/2x1/2x1-1/4"	25	3x3x2"	5
4x1-1/4		7	10		1-1/2x1/2x1-1/2"	25	3x3x2-1/2"	5
4x1-1/2		6	10	7	1-1/2x3/4x1/2"	40	4x4x1/2"	3
4x2-1/2	3	6	10	8	1-1/2x3/4x3/4"	40	4x4x3/4"	2
4x3	3	6	10	8	1-1/2x3/4x1"	40	4x4x1"	2
5x3		6			1-1/2x3/4x1-1/4"	25	4x4x1-1/4	2
5x4		4	6		1-1/2x3/4x1-1/2"	30	4x4x1-1/2"	2
6x2		4	5		1-1/2x1x1/2"	40	4x4x2"	2
6x2-1/2		3			1-1/2x1x3/4"	30	4x4x2-1/2"	2
6x3		4	5		1-1/2x1x1"	30	4x4x3"	2
6x4		4	5	5	1-1/2x1x1-1/4"	20	5x5x3"	2
6x5		2	5		1-1/2x1x1-1/2"	20	6x6x2"	1
					1-1/2x1-1/4x1/2"	30	6x6x2-1/2"	1
					1-1/2x1-1/4x3/4"	30	6x6x3"	1
					1-1/2x1-1/4x1"	25	6x6x4"	1

The flowchart illustrates the foundry process, starting with material selection and ending with shipping. The process is divided into several stages: material selection, melting, casting, sand preparation, mold making, core making, annealing, grinding, shot blasting, galvanizing, threading, pressure testing, rust prevention, packing, stock keeping, and shipping.

Legend Table:

NO	DETAIL
1	LAB
2	BALANCE WEIGHT
3	INDUCTION FURNACE
4	POURING
5	MOLD MAKING
6	SAND MILL
7	CORE
8	CORE SAND
9	COOLING
10	OSCILLATING CONVEYOR
11	SAND SILO
12	SELECTING
13	SCRAP
14	GOOD CASTING
15	RUNNERSAND RISERS
16	RETURNS
17	PACKING FOR ANNEALING
18	ANNEALING
19	GRINDING
20	SHOT BLASTING
21	GALVANIZING
22	THREADING
23	PRESSURE TESTING
24	RUST PREVENTION
25	PACKING
26	STOCK KEEPING
27	SHIPPING

BRITISH STANDARD THREADS

British Engineering Standard Association Reports No. BS 21-1985

Forms of British Standard Pipe Threads

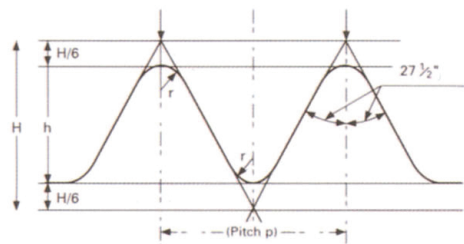


Fig. 1. (Parallel)

$$H = 0.960491 \times p$$

$$h = 0.640327 \times p$$

$$r = 0.137329 \times p$$

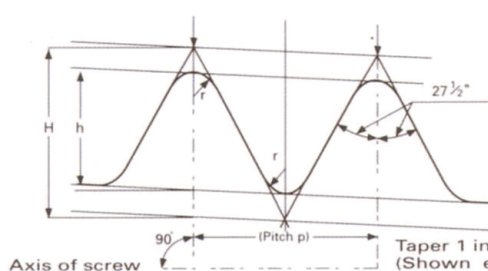


Fig. 2. (Taper)

$$H = 0.960237 \times p$$

$$h = 0.640327 \times p$$

$$r = 0.137278 \times p$$




Fig. 3. (Taper)

Table 1. Basic Sizes

							Dimensions, in Inch
Nominal Bore of Pipe	Approximate Outside Diameter of Black Pipe	Number of Threads per Inch	Pitch	Depth of Thread	Diameter at Gauge Plane (Gauge Dia.)	Distance of Gauge Diameter from End (Gauge Length)	Length of Useful Thread
	A		P	h	B	F	E
1/8	0.400	28	0.03571	0.0229	0.383	0.1563	0.2545
1/4	0.538	19	0.05263	0.0337	0.518	0.2367	0.3814
3/8	0.676	19	0.05263	0.0337	0.656	0.2500	0.3947
1/2	0.847	14	0.07143	0.0457	0.825	0.3214	0.5178
3/4	1.063	14	0.07143	0.0457	1.041	0.3750	0.5714
1	1.336	11	0.09091	0.0582	1.309	0.4091	0.6591
1 1/4	1.677	11	0.09091	0.0582	1.650	0.5000	0.7500
1 1/2	1.909	11	0.09091	0.0582	1.882	0.5000	0.7500
2	2.381	11	0.09091	0.0582	2.347	0.6250	0.9204
2 1/2	2.996	11	0.09091	0.0582	2.960	0.6875	1.0511
3	3.499	11	0.09091	0.0582	3.460	0.8125	1.1761
3 1/2	3.991	11	0.09091	0.0582	3.950	0.8750	1.2386
4	4.494	11	0.09091	0.0582	4.450	1.0000	1.4091
5	5.498	11	0.09091	0.0582	5.450	1.1250	1.5795
6	6.501	11	0.09091	0.0582	6.450	1.1250	1.5795

AMERICAN STANDARD THREADS

Approved by American Standard Association ANSI B1.20.1-1983

Forms of American Standard Pipe Threads

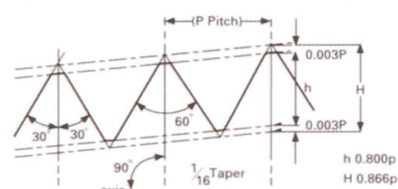


Fig. 4. (Taper)*

$$H = 0.8660 \times p$$

$$h = 0.8000 \times p$$

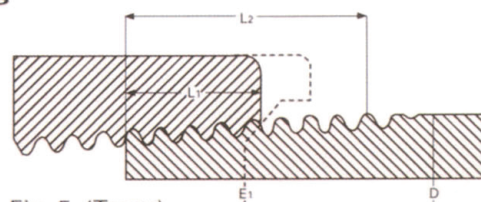


Fig. 5. (Taper)

$$L_2 = (0.8D + 6.8) \frac{1}{n}$$

*Straight Pipe Threads; the pitch, angle, and depth of thread are the same as the corresponding dimensions of the taper pipe threads

Table 2. Basic Dimensions

							Dimensions, in Inch
Nominal Pipe Size	Outside Diameter of Pipe	Threads per Inch	Pitch of Threads	Hand-Tight Engagement		Effective Thread Length External	Depth of Thread
	D	n	P	L ₁	E ₁	L ₂	h
1/8	0.405	27	0.03704	0.180	0.37476	0.2639	0.02963
1/4	0.540	18	0.05556	0.200	0.48989	0.4018	0.04444
3/8	0.675	18	0.05556	0.240	0.62701	0.4078	0.04444
1/2	0.840	14	0.07143	0.320	0.77843	0.5337	0.05714
3/4	1.050	14	0.07143	0.339	0.98887	0.5457	0.05714
1	1.315	11 1/2	0.08696	0.400	1.23863	0.6828	0.06957
1 1/4	1.660	11 1/2	0.08696	0.420	1.58338	0.7068	0.06957
1 1/2	1.900	11 1/2	0.08696	0.420	1.82234	0.7235	0.06957
2	2.375	11 1/2	0.08696	0.436	2.29627	0.7565	0.06957
2 1/2	2.875	8	0.12500	0.682	2.76216	1.1375	0.10000
3	3.500	8	0.12500	0.766	3.38850	1.2000	0.10000
4	4.000	8	0.12500	0.821	3.88881	1.2500	0.10000
5	4.500	8	0.12500	0.844	4.38712	1.3000	0.10000
6	5.563	8	0.12500	0.937	5.44929	1.4063	0.10000
6	6.625	8	0.12500	0.958	6.50597	1.5125	0.10000



Head Office : Riyadh - Al Malaz - Sallaheldin St. (60st)
Kingdom of Saudi Arabia - C.R. 1010415318 C.C.NO 105319
Un. No. 920005155 - P.O.Box 61947 Riyadh 11575

www.arabcoo.com
sales@arabcoo.com