


www.arabcoo.com



Product Catalog



SMALL PROPELLER FANS

CHARACTERISTICS

- Adopted a streamlined blade for low sound levels.
- Anti corrosive and vibro-isolating properties.

USAGES


- Suitable for quiet places like factories, workshops, warehouses, restaurants, etc.
- Assembling all apparatus.





SPECIFICATIONS

Model	Impeller Size (mm)	Power	Poles (P)	Air Volume (m³/h)	Input (W)	Current (A)	Weight (Kg)
TFP-F20 ASE	210	1Ø 220V 60Hz	4	750	30	0.25	3
TFP-F25 ASE	250	1Ø 220V 60Hz	4	1,200	40	0.3	4
TFP-F30 BSE	300	1Ø 220V 60Hz	4	1,500	60	0.3	5
TFP-F35 CSE	350	1Ø 220V 60Hz	4	2,800	95	0.5	8
TFP-F40 DSE	400	1Ø 220V 60Hz	4	4,000	190	0.9	9
TFP-G45 ES	450	1Ø 220V 60Hz	6	5,500	170	0.8	16
TFP-F45 ES	450	1Ø 220V 60Hz	4	6,700	400	2.0	16
TFP-F45 ET	450	3Ø 380V 60Hz	4	6,400	390	0.8	16

PERFORMANCE CURVE

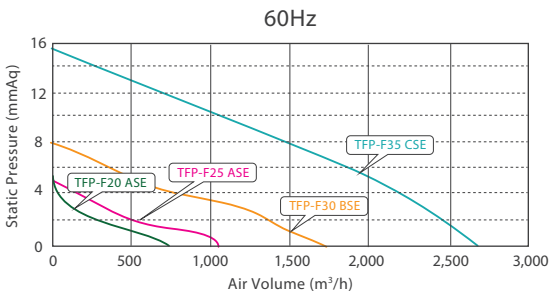

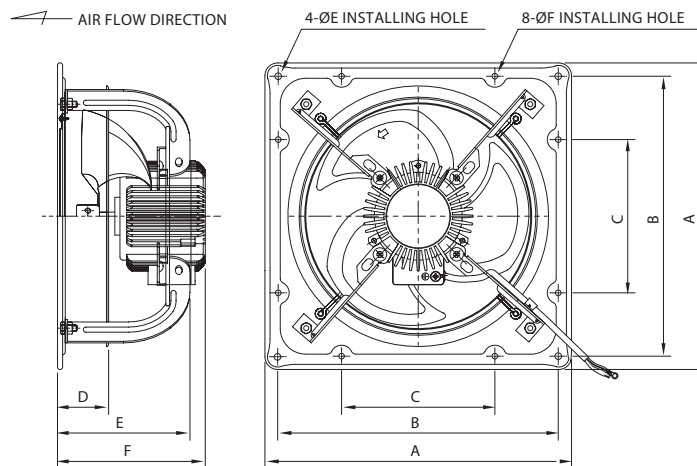


DIMENSIONS

Model	A	B	C	D	E	F
TFP-F20 AS	300	274	150	50	123	142
TFP-F25 AS	350	325	160	50	150	167
TFP-F30 BS	400	370	200	50	154	171
TFP-F35 CS	440	405	200	60	159	175
TFP-F40 DS	490	450	240	70	172	187
TFP-G / F45 ES	605	560	280	85	225	260
TFP-F45 ET						

ACCESSORY SHUTTER



PERFORMANCE CURVE

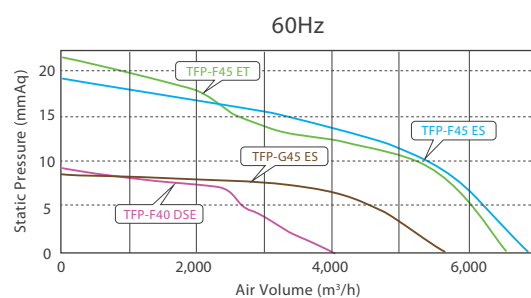


MEDIUM PROPELLER FANS

CHARACTERISTICS

- Impeller is designed for high air volume and static pressure.
- Adopted a stainless impeller for anti corrosive.
- Low sound levels.

USAGES


- Ventilation of factory, warehouse, greenhouse, where the large air volume is needed.
- Barn, poultry farm, etc.

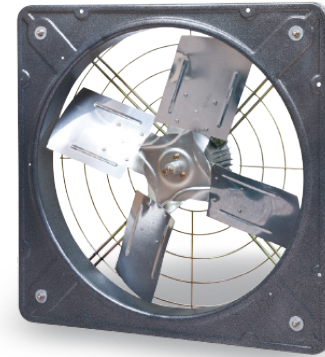


TFP-H80 ES / ET

DIMENSIONS


TFP-F50 ES / ET


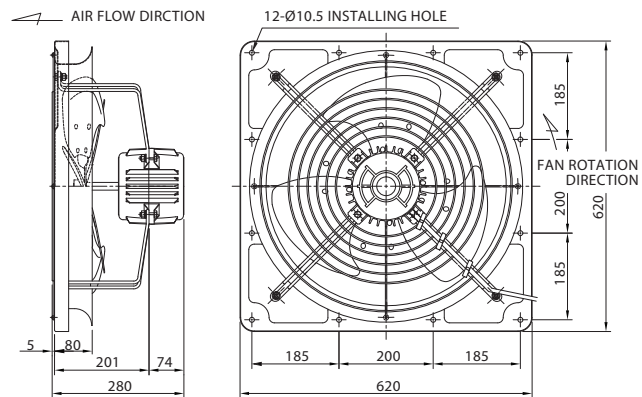


TFP-G60 ES / ET

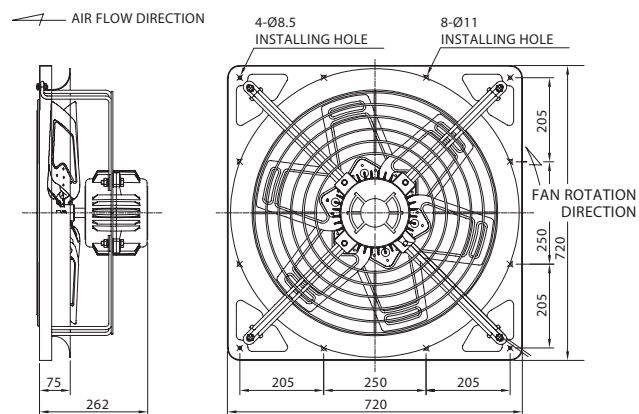

PERFORMANCE CURVE

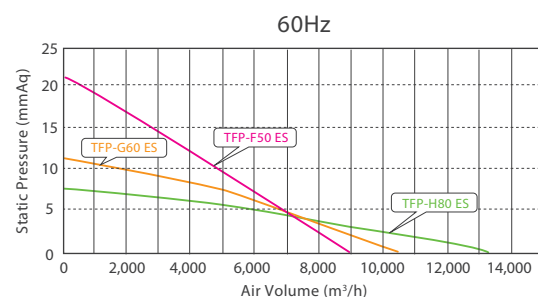

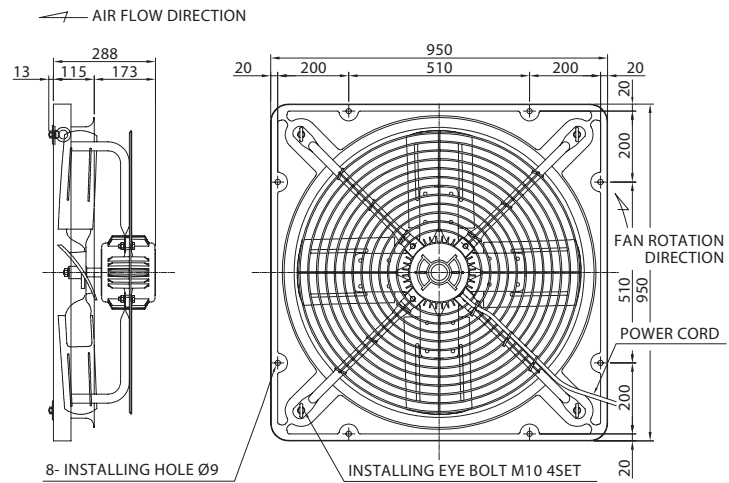

SPECIFICATIONS



Model	Impeller Size (mm)	Power	Poles (P)	Air Volume (m ³ /h)	Input (W)	Current (A)	Weight (Kg)
TFP-F50 ES	500	1Ø 220V 60Hz	4	8,800	510	2.5	17
TFP-F50 ET		3Ø 220/380V 60Hz		8,800	510	2.4 / 1.5	
TFP-G60 ES	580	1Ø 220V 60Hz	6	10,600	580	2.5	26
TFP-G60 ET		3Ø 220/380V 60Hz		10,600	550	2.0 / 1.2	
TFP-H80 ES	800	1Ø 220V 60Hz	8	13,500	800	3.7	31
TFP-H80 ET		3Ø 220/380V 60Hz		13,650	835	3.1 / 1.8	

PROPELLER FANS

ACCESSORY SHUTTER



PERFORMANCE CURVE

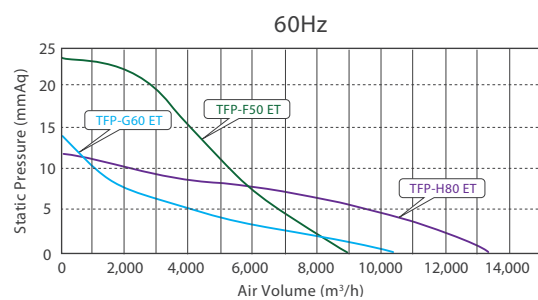


LARGE PROPELLER FANS

CHARACTERISTICS

- Impeller is designed for high air volume
- Adopted a stainless impeller for anti corrosive.
- Low sound levels.

USAGES


- Ventilation of factory, warehouse, greenhouse, where the large air volume is needed.
- Barn, poultry farm, etc.

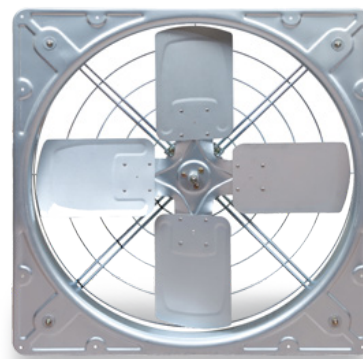



TFP-H100 FS / FT

DIMENSIONS


TFP-H100 ES / ET

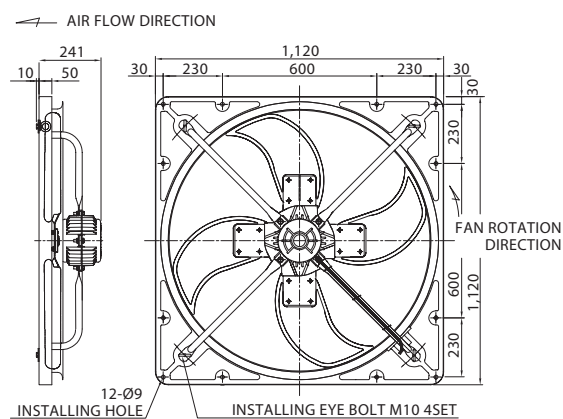


TFP-H110 ES / ET

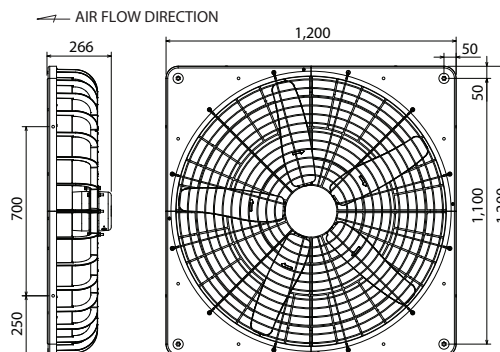

TFP-T120 ES / ET

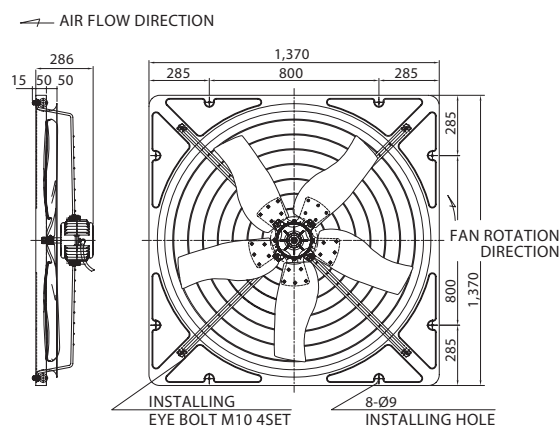

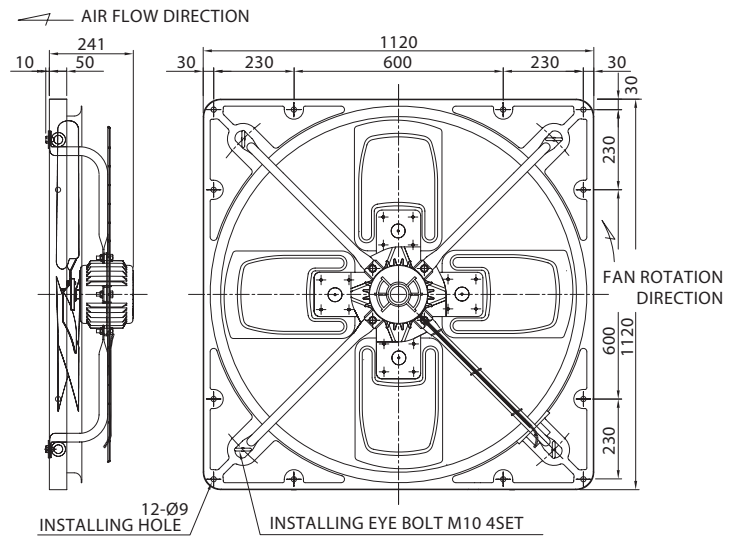

SPECIFICATIONS


Model	Impeller Size (mm)	Power	Poles (P)	Air Volume (m³/h)	Input (W)	Current (A)	Weight (Kg)
TFP-H100 FS	1,000	1Ø 220V 60Hz	8	22,500	650	2.7	31
TFP-H100 FT	1,000	3Ø 380V 60Hz	8	22,500	650	1.3	31
TFP-H100 ES	1,000	1Ø 220V 60Hz	8	21,000	520	2.2	29
TFP-H100 ET	1,000	3Ø 380V 60Hz	8	21,000	520	1.1	29
TFP-H110 ES	1,100	1Ø 220V 60Hz	8	22,480	573	2.58	29
TFP-H110 ET	1,100	3Ø 380V 60Hz	8	22,480	560	1.25	29
TFP-T120 ES	1,200	1Ø 220V 60Hz	10	28,000	730	3.4	38
TFP-T120 ET	1,200	3Ø 380V 60Hz	10	28,000	700	1.7	38

SUB-PRODUCT STAND TYPE



TFT-H100 / H110

PERFORMANCE CURVE

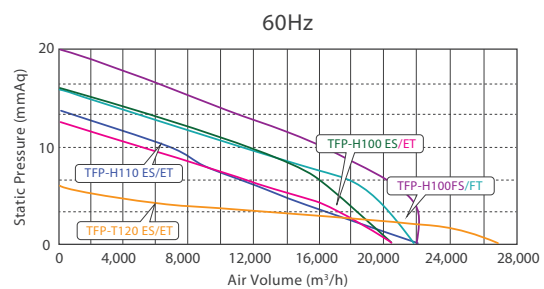

ACCESSORY - SHUTTER

CHARACTERISTICS

- Aluminum shutter.
- Anti corrosive.
- Noiseless opening sound.


USAGES

- Controlling the air volume of propeller fan.
- Keeps out of rainwater, pressure and dust from outside.







DIMENSIONS


Model	A	B	C	D	E	F	G	H	J	K
SHP-20	300	274	274	150	235	7	7	233	50	40
SHP-25	350	325	301	160	285	7	7	283	50	40
SHP-30	400	371	344	200	325	9	9	325	50	40
SHP-35	440	405	402	200	365	9	9	363	50	40
SHP-40	490	451	449	240	415	11	11	413	50	40
SHP-45	605	559	539	280	512	11	9 x 7.5	508	50	40
SHP-50	620	570	570	200	527	9	9	524	50	40
SHP-60	720	660	660	250	627	9	9	620	50	40

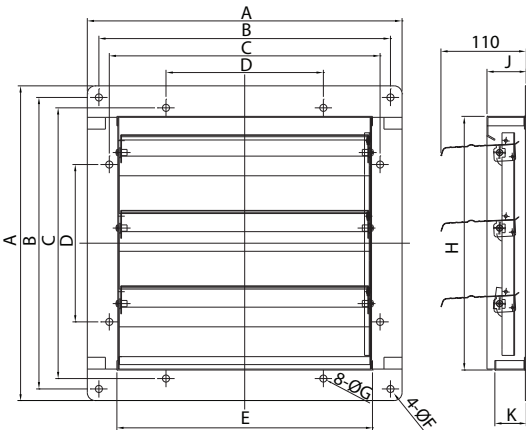

Model	A	B	C	D	E	F	G
SHP-80	950	910	510	9	60	134	880
SHP-100	1,120	1,060	600	10	70	144	1,028.5

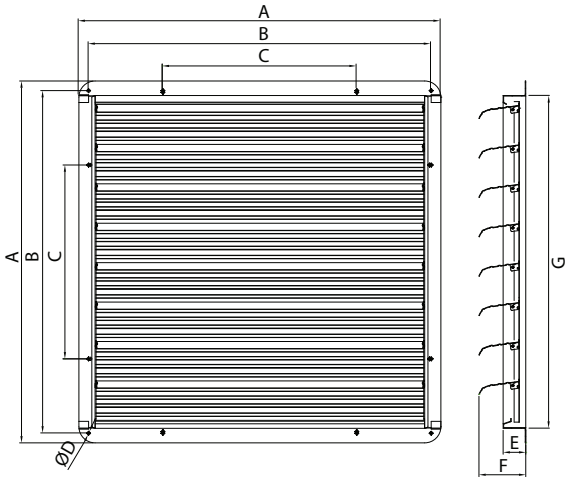





* Product specifications and performance are subject to change without notice to improve quality. / Version 4 (Jan. 2018)



Sales agent

Alwzara Arabia Commerce Est.
Kingdom of Saudi Arabia
Phone : +966 920005155 (18)
Fax : +966 1 2917753
Email : purchase@arabcoo.com
Web : www.arabcoo.com

Manufacturer

Fanzic Co., Ltd. Korea

